

OCL500H SEMI AUTO COLLATOR




OCL500H SEMI AUTO COLLATOR

- High speed auto collation of 'single core' or pre-welded 'split core' product to overlay
- Simple to operate
- Compact footprint
- Proven industry track record
- User friendly touch screen control system with self diagnostic prompts and modem interface facility
- Robust construction.

Specifications

General: Safety: All Oasys machines are CE certified and comply with relevant European safety requirements including emergency stops and interlocked guarding.

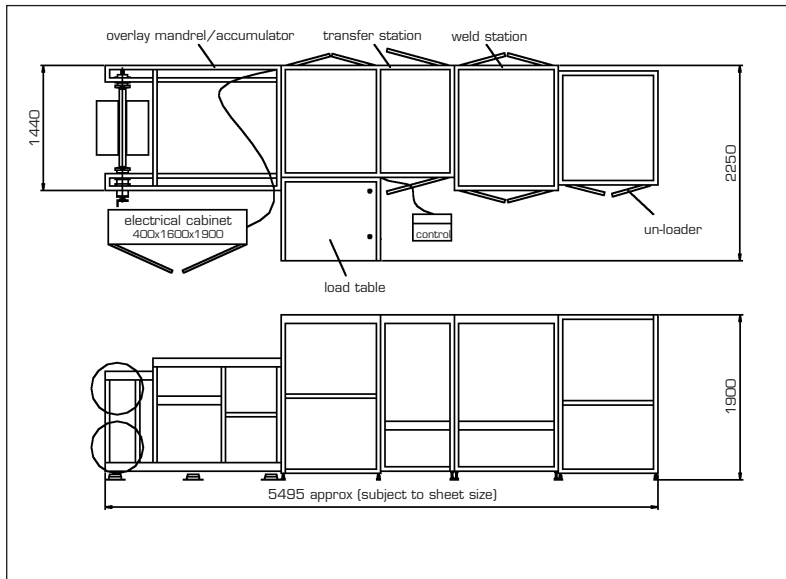

OCL500H FOOTPRINT

TYPICAL SPECIFICATION FOR THE OCL500H

- Output: up to 800 sheets per hour depending upon operator
- Overlay thickness: 40 to 200 micron
- Core thickness: 100 to 800 micron
- Collation accuracy: +/- 0.15mm
- Tape position accuracy: +/- 0.15mm
- Electrical: 220V or 400V, (+/-5%) 50Hz or 60Hz, 3 Ph, 7 KVA
- Pneumatics: 793 litres/min @ 5.5 bar (28 CFM @ 80 psi)
- Machine Weight (packed): 3826 kgs approx.
- Total Shipping Dimensions (3 crates): L705 x W206 x H214 cm

* Specifications are subject to change without notification.

* Actual output rates will be dependent upon product used, settings and configurations.

For further information:

OASYS TECHNOLOGIES LTD, Jubilee Trade Centre, Letchworth Garden City, Herts, SG6 1SP, England
Tel: +44 1462 480933 Fax: +44 1462 480292 E-mail: sales@oasys.uk.com Web Site: www.oasys.uk.com