

OHR 100 OASYS HOT ROLL SYSTEM

SIGNATURE FOIL, MAGNETIC TAPE AND SCRATCH FOIL APPLICATION




OHR 100 Hot Roll System

- Wide range of card body thicknesses can be accommodated
- 500 Card input hopper feed
- Process speeds up to 7,000 cards per hour
- Shingling conveyor card exit facility
- Easy to use control features
- High level of adjustment of all key parameters

including:

- Application pressure
 - Application temperature
 - Panel position
 - Foil width
 - Foil process speed
 - Foil tension
- Fine tuning can be undertaken whilst machine is running


OHR 100

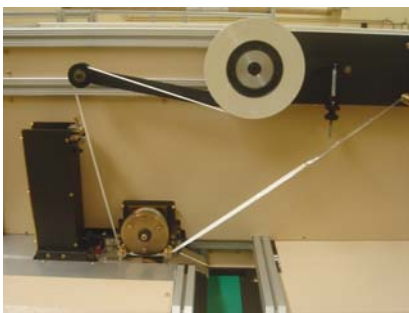

FOIL TRANSPORT

Specifications

General: Safety: All Oasys machines are CE certified and comply with relevant European safety requirements including emergency stops and interlocked guarding.

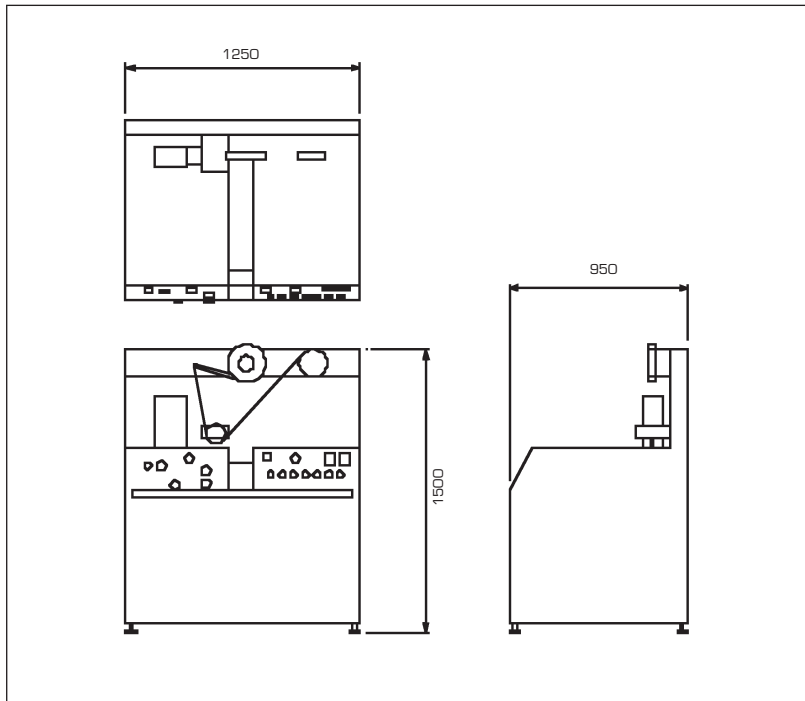

OHR 100 FOOTPRINT

TYPICAL SPECIFICATION FOR THE OHR 100

- Output : 3,600 - 7,000 Cards per hour (Output is dependent upon the use of good quality foils, the type of foil and the card substrate)
- Electrical : AC 220-240V, 50/60 Hz, 10 amps (Other configurations available on request)
- Air : 80 - 100 PSI
- Noise : Below 40 Db
- Machine net weight : 285 Kgs
- Machine Dimensions : L 950 x W 1250 x H 1500mm

* Specifications are subject to change without notification.
* Actual output rates will be dependent upon product used, settings and configurations.