

OASYS LABORATORY CARD LAMINATORS, PUNCHES AND FLEX TESTERS

OLA6 LAMINATOR, OEP100 PUNCH UNIT,
OFT100 FLEX TESTER, OMP100 MANUAL PUNCH



OLA6 LAMINATOR

OLA6 LAMINATOR

- Provides precision, flexible lamination of ISO cards for small volume and development applications.
- Electrically heated and air cooled with multi pressure and temperature control managed by a touch screen visual display unit.
- Simple to operate
- Compact
- Laminates 10 cards/cycle



OEP100 PUNCH UNIT

OEP100 PUNCH UNIT

- 1-UP Electric Punch Unit
- Applications – Bank, ID Cards, Contactless Cards
- Guaranteed ISO standard 'Bank Card Quality
- Pressure switch activated



OFT100 FLEX TESTER

- Guarantees flex and torsion testing to ISO standard
- Takes up to 5 cards in each station
- Counter facility upto 10,000




OMP100 PUNCH UNIT


- For use with non bank quality cards
- Application – sampling
- Hand operated
- Cost effective

Specifications

General: Safety: All Oasys machines are CE certified and comply with relevant European safety requirements including emergency stops and interlocked guarding.

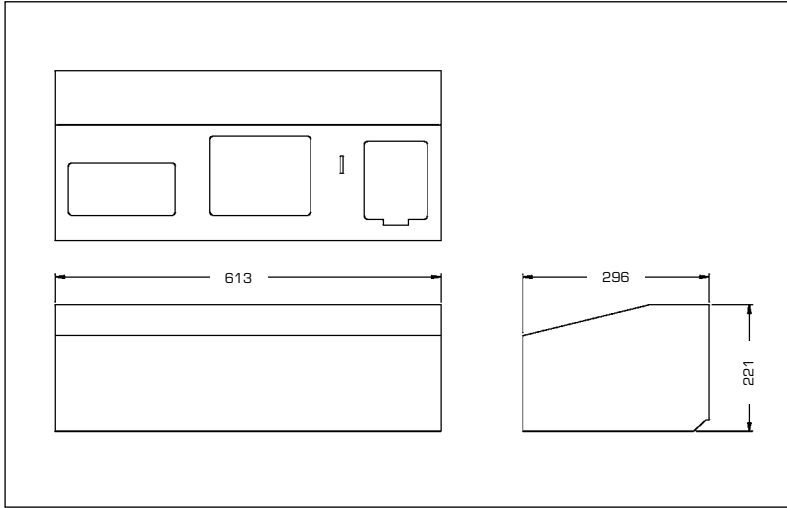

OFT100 FLEX TESTER FOOTPRINT

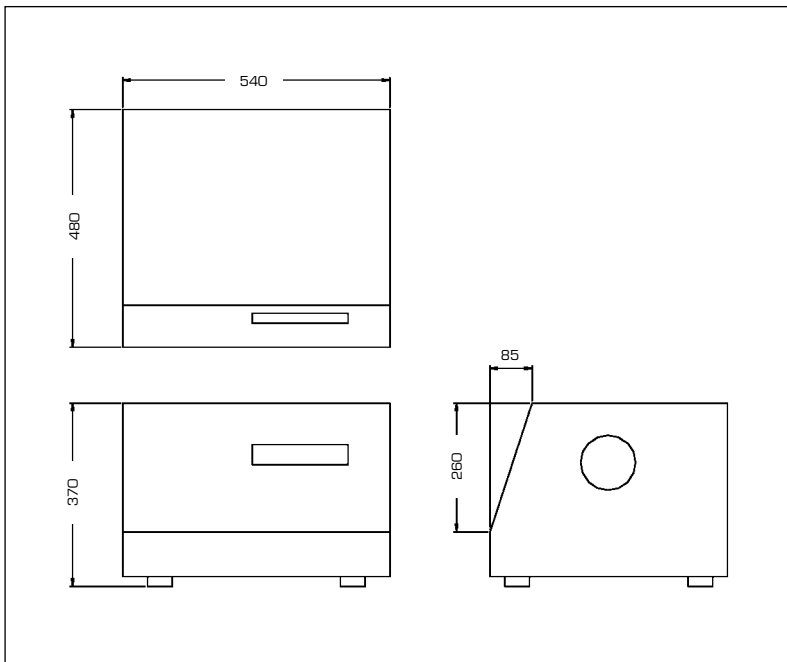

OLA6 LAMINATOR FOOTPRINT

TYPICAL SPECIFICATIONS

OLA6 LAMINATOR

- Typical Sheet Size: 2 sheets @ 75mm x 110mm OR 1 sheet @ 150mm x 110mm
- Power – 110-120 or 220-240V single phase, 2.5 KVA
- Machine Weight (packed): 45 Kgs approx
- Machine Dimensions (packed): L68 x W62 x H67cm

OEP100 PUNCH

- Material thickness 0.5mm to 1mm
- Power – 110-120 or 220-240V single phase, 2 KVA
- Machine Weight (packed): 60 Kgs
- Machine Dimensions (packed): L55 x W55 x H45 cm

OFT100 FLEX TESTER

- Power – 110-120 or 220-240V, s single phase, 0.1 KVA
- Machine Weight (packed): 24.5 kgs
- Machine Dimensions (packed): L61.5 x W29.5 x H24 cm

- * Specifications are subject to change without notification.
- * Actual output rates will be dependent upon product used, settings and configurations.

For further information:
OASYS TECHNOLOGIES LTD, Jubilee Trade Centre, Letchworth Garden City, Herts, SG6 1SP, England
Tel: +44 1462 480933 Fax: +44 1462 480292 E-mail: sales@oasys.uk.com Web Site: www.oasys.uk.com