

OASYS OSS RANGE OF SINGLE STACK LAMINATORS




OSS2-10 SINGLE STACK LAMINATOR

OSS SERIES SINGLE STACK LAMINATORS

- The only single stack laminator designed specifically for the plastic card industry
- Proven industry track record
- Thermal efficient lightweight aluminium alloy platens
- Semi or optional fully automatic tray load/unload
- Hardened steel base for lamination trays, reducing heat distortion and ensuring consistent reliable flow of trays.
- Robust construction
- User friendly touch screen control system, with self diagnostic prompts and modem interface facility
- Suited for high volume contactless card production
- Integral 'tilt stations' for compact footprint
- Worldwide sales & service
- Optional modem link facility
- 4 cylinder, twin pump hydraulic facility, fast close, slow pressing

Specifications

General: Safety: All Oasys machines are CE certified and comply with relevant European safety requirements including emergency stops and interlocked guarding.

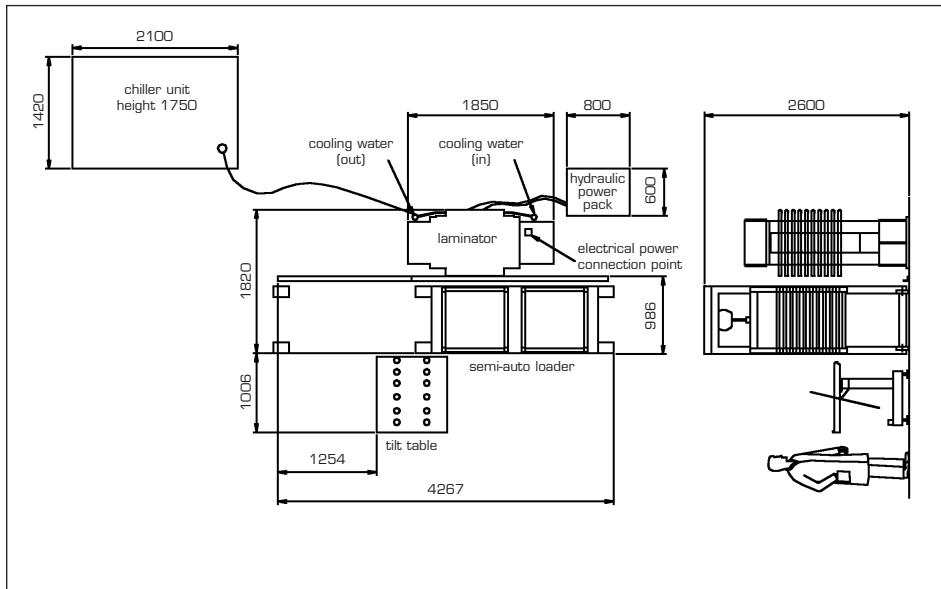

OSS2-10 SINGLE STACK LAMINATOR FOOTPRINT

TYPICAL SPECIFICATIONS FOR THE OSS2-10 LAMINATOR

- Output up to 14,000 cards/hour
- Max. Lamination area: 600 x 628 mm
- Electrical: 400V +/- 5%, 50 or 60Hz, 3 Ph, 123 KVA
- Pneumatics: 142 lts/min @ 5.5 bar (5 CFM @ 80 psi)
- Machine Weight (packed): 6257 kgs
- Total Shipping Dimensions (3 crates): L734 x W157 x H291cm

Note: Typical product laminating areas from 600 x 600 to 840 x 600 mm (other sizes available on request)
No. of openings typically 6, 10 (other variations available on request)

- * Specifications are subject to change without notification.
- * Actual output rates will be dependent upon product used, settings and configurations.