



OASYS OCP310 SERIES CARD PUNCHES



OCP 313A AUTOMATIC SHEET FEED WITH SHINGLING CARD EXIT CONVEYOR

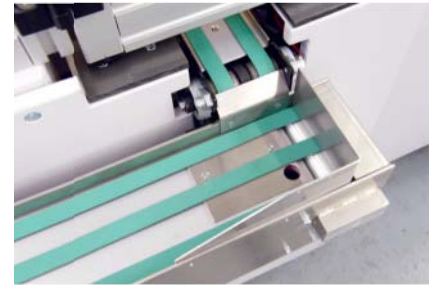

Shingling Exit conveyor

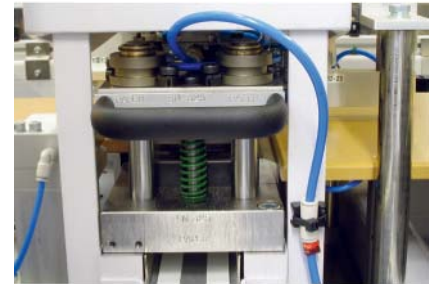

Oasys in house tooling

OCP310 SERIES PUNCH


- Unique double registration 3 axis alignment for highest punch accuracy
- Proven industry track record
- Can be configured to wide range of sheet formats
- Quick tool change
- User friendly touch screen control man/machine interface
- All tooling made in-house
- Supplied with fully automatic sheet loading facility
- Supplied with shingling card exit conveyor facility
- Version available to process Polycarbonate material

OPTIONAL FEATURES

- Modem link facility
- De-ionised air supply process
- In-line multi-sheet detection facility

Specifications

General: Safety: All Oasys machines are CE certified and comply with relevant European safety requirements including emergency stops and interlocked guarding.

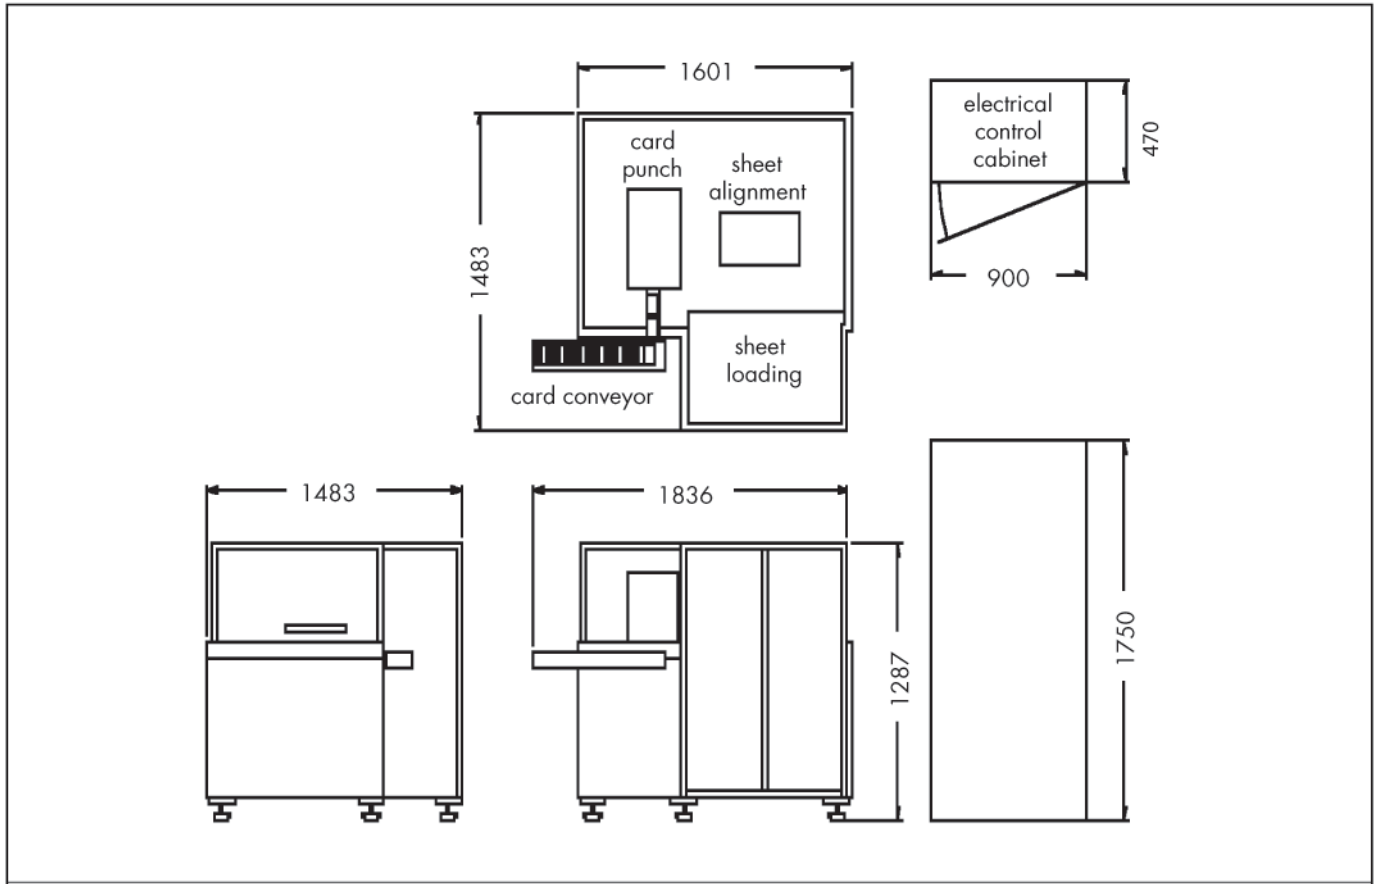

OCP 313A AUTOMATIC SHEET FEED WITH SHINGLING CARD EXIT CONVEYOR

TYPICAL SPECIFICATION FOR THE OCP313A CONFIGURATION

- Output up to 15,000 cards per hour
- Electrical: 220V OR 400V, (+/- 5%) 50 OR 60Hz, 3 Ph, 3 KVA
- Pneumatics: 114 litres/min @ 5.5 bar (4 CFM @80 psi)
- Machine Weight: Packed 1030 kgs approx
- Machine Dimensions: Packed L2400 x W1880 x H1560 mms

Note: OCP310 SERIES AVAILABLE AS 1-UP, 2-UP, 3-UP AND 4-UP

- * Specifications are subject to change without notification.
- * Actual output rates will be dependent upon product used, settings and configurations.

For further Information:

OASYS TECHNOLOGIES LTD, Unit 3 Stratton Business Park, Montgomery Way, Biggleswade, Bedfordshire, UK, SG18 8UB

Tel: +44 (0) 1767 600232 Fax: +44 (0) 1767 601532 E-mail: sales@oasys.uk.com Website: www.oasys.uk.com